5501-M

Platine d'analyse pour sonde d'humidité

Moisture processor

The 5500 moisture detection series is designed to respond to the presence of water and other non-flammable conductive liquids and to be connected in the closed loop of an alarm system. Two sensors are available; 5505 under carpet sensorand 5515 surface mount sensor. Any combination of up to 4 sensors can be used with the 5501 moisture processor.

The 5501 moisture processor can be used with any closed loop control, dialer or wireless transmitter input circuit. The processor comes with internal lithium batteries that have an anticipated life time of 10 to 15 years. The processor offers flexibility in mounting with no need for an external power source and minimal wiring required.



Détails

- Détecte la présence de liquide et produits non inflammable
- Alimentation autonome

5501-M

Platine d'analyse pour sonde d'humidité

Spécifications techniques

General

Sensor type	Überflutungssensor
Connections	Screw terminals
Alarm contact	NC, aperto finchè umidità presente
Alarm delay	10 sec

Wired/wireless


Wired-wireless	Verdrahtet

Electrical

Batteries	Lithium battery
Battery lifetime	Da 10 a 15 anni

Physical

Physical dimensions	116 × 70 × 35 mm
Colour	Braun

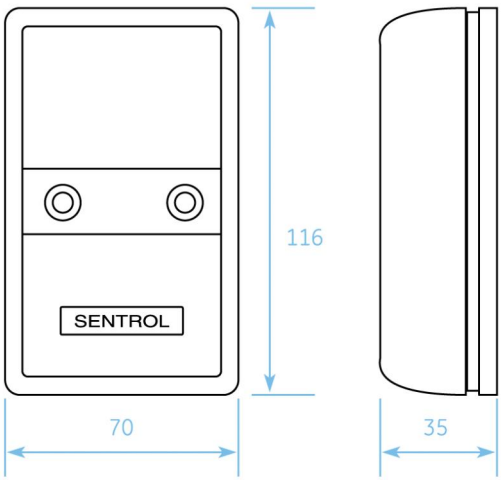

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57