
ATS1500A-IP-MM

Advisor Advanced ATS1500A-IP control panel in medium metal housing, Intergrated Ethernet connection, EN grade 3, 8 - 32 zones, 4 areas, 1A PSU. Wired or wireless (hybrid) using plug-

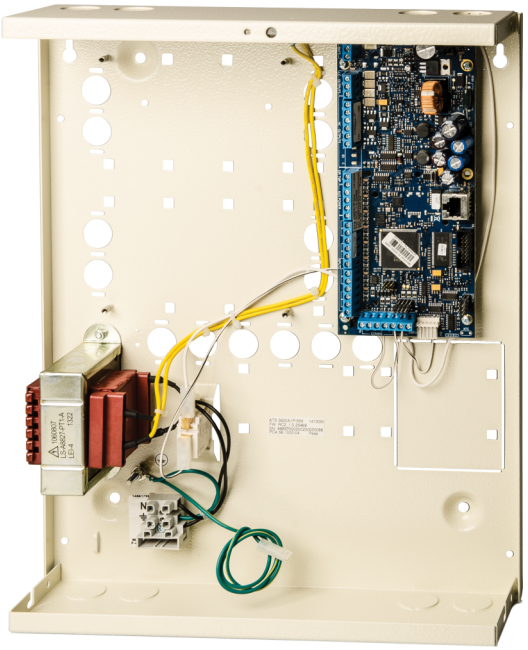

Details

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 50 users
- EN50131 Security grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Multilingual: each user his own language
- Integrated 10/100Mb Ethernet connection
- IP Alarm reporting to OH-NETREC receiver - Optional GPRS
- U/D over IP / GPRS
- IP Diagnostics
- Dynamic/Static IP & DNS support
- Auto Arming - Schedules - Times Outputs

ATS1500A-IP-MM

Advisor Advanced ATS1500A-IP control panel in medium metal housing, Intergrated Ethernet connection, EN grade 3, 8 - 32 zones, 4 areas, 1A PSU. Wired or wireless (hybrid) using plug-

Technische specificaties

System

Product line	Advisor Advanced
Product type	Integreret adgangskontrol
Panel type	Hybrid
Kit	No
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	16
Specified cable	WCAT52 / WCAT54

Inputs

Max no. of inputs	32
Onboard inputs	8
Inputs plug-in expansion	8

Outputs

No. of outputs	128
No. of onboard outputs	5

Area

No. of areas	4

User/Cards

Max. no. of users	more than 2000
Max. no. of cards	50
Max. no. of PIN codes	50

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

Electrical

Power supply type	230 VAC
Power supply value	230 VAC +10%, -15%, 50 Hz
Mainboard current consumption	150 mA
Max system current	950 mA at 13.8 V ±0.2 V
Max aux power current	840 mA
Auto-reset fuses	5
Glass break fuses	1

Physical

Physical dimensions	315 × 388 × 85 mm
Material	Stål (malet)
Housing	Mellemmetal

Environmental

Operating temperature	-10 to +55°C
Relative humidity	0.95
Environmental Class	Class II, indoor
IP rating	30

Regulatory

EN50131 Grade	Lønklasse 3, med sabotagesæt
Compliancy	CE

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57