ACT725-37


Proxcard II sitecode 37

Overview

The ProxCard II Proximity access card incorporates radio frequency identification electronics into a thin, durable polycarbonate package approximately the size of a standard credit card. It is thin and flexible enough to be carried in a wallet or on a strap clip.

Features

ProxCard II cards are easily customized with multicoloured graphics. With the application of self-adhesive photo pouch or PVC overlay, the ProxCard II card is compatible with most photo ID systems.

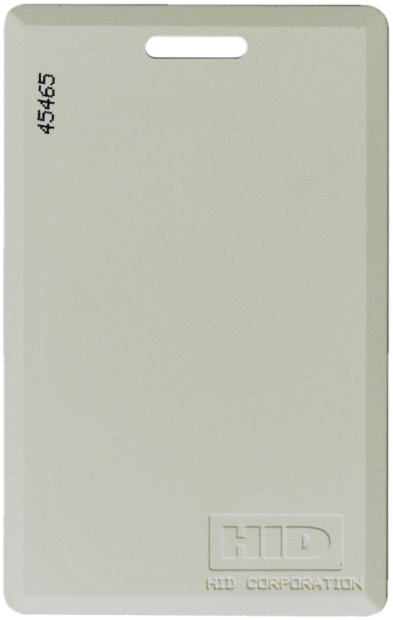

Details

- Offers universal compatibility with all HID proximity readers
- Provides durable packaging and consistent read range
- Provides an external number for easy identification and control
- HID standard 32-bit configuration
- A PVC overlay allows for on-site photo ID using most direct image printers

ACT725-37

Proxcard II sitecode 37

Technical specifications

System

Supported readers	HID Proximity Readers

Technology

Credential type	Proximity
Credential operating frequency	125 KHz

Physical

Form factor	CR80 (Credit)

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 10:37