
ACT407E

(25 PACK) Mifare Classic card S50 with 7-byte UID serial number (CSN)

Product overview

These Mifare Classic1k cards are to be used on ATS1160N/ATS1161N, ACI406/ACI407 and any other KGS Fire & Security Mifare or Transition reader supporting 7-byte Card Serial Numbers (CSN). The cards are unprogrammed and only the unique 7-byte ID-number of the Mifare® chip, the so called Chip or Card Identification Number (CSN) is used by the readers.

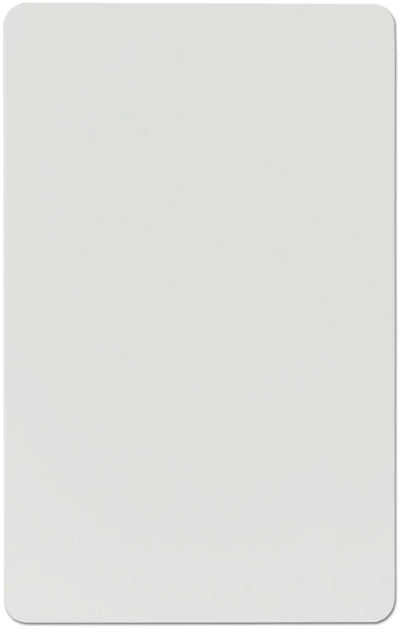

Details

- Read only for CSN (7-byte)
- Read / Write function for card sectors
- Packed by 25

ACT407E

(25 PACK) Mifare Classic card S50 with 7-byte UID serial number (CSN)

Technical specifications

System

Reading distance	0 to 10 cm
Memory size	1K
No. of Mifare bytes CSN	7 Byte (S50)
Supported readers	ACI406 / 407 Mifare-Lesegeräte, ATS1160 / 1161 Mifare-Lesegeräte

Technology

Credential type	Nahdistanz
Credential operating frequency	13.56 MHz
Supported technology 13.56 MHz	MIFARE Classic (CSN)

Ordering information

Cards/tags in package	25

Physical

Material	PVC
Form factor	CR80 (Kredit)
Physical dimensions	86 x 54 mm
Colour	Weiß

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:24